

GET IN TOUCH




(563) 875-6257



sales@doublel.com



2020 Beltline Rd, Dyersville, IA 52040.

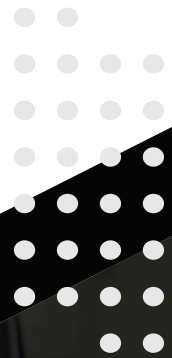

”

**WHERE
AFFORDABILITY
MEETS TECHNOLOGY
SINCE 1973**

”



DIRECT X EXHAUST FANS

Helping Growers with EC3 Technology

Since 1973, Double L Group has been committed to providing high-quality products and services worldwide that are based on value, customer's needs, and excellent sales support.

Model	Part Number	Prop. Dia.	Fan Speed	RPM	Motor HP	.05" SP		.10" SP		.15" SP	
						CFM	CFM/Watt	CFM	CFM/Watt	CFM	CFM/Watt
D i r e c t X 3 6	D R X 3 6 2 W S	36"	100%	1008	1.25	13,450	16.7	12,890	15.6	12,210	14.3
			90%	898		11,790	20.3	11,120	18.6	10,380	16.8
			80%	800		10,210	24.2	9,410	21.8	8,420	18.9
			70%	698		8,360	28.7	7,410	24.7	5,160	17.8
D i r e c t X 4 8	D R X 4 8 2 W S	48"	100%	657	1.5	22,800	20.9	21,700	19.1	20,400	17.4
			90%	581		19,700	25.5	18,400	22.8	16,600	19.8
			80%	519		16,600	28.6	15,000	24.8	12,000	19.9
			70%	452		13,700	34.4	10,900	26.6	6,200	14.3
D i r e c t X 5 1	D R X 5 1 2 W S	51"	100%	693	2.5	30,100	17.6	29,000	16.3	27,800	15.1
			90%	622		26,800	21.6	25,500	19.3	23,900	17.2
			80%	557		23,500	25.3	22,000	22.6	20,200	20.0
			70%	485		19,700	30.4	17,600	25.7	14,800	21.1
D i r e c t X 5 7	D R X 5 7 2 W S	57"	100%	685	3	32,900	19.9	31,600	18.2	30,200	16.6
			90%	616		29,500	23.9	27,900	21.3	26,100	18.9
			80%	544		25,300	28.7	23,300	24.8	20,900	21.2
			70%	478		21,100	33.2	18,300	27.3	15,100	22.2

”

WE STRIVE TO PROVIDE
OUR DISTRIBUTORS AND CUSTOMERS
WITH INNOVATIVE PRODUCTS WITH A GREAT
RETURN ON INVESTMENT.

.20" SP		BESS Labs
CFM	CFM/Watt	
11,620	13.4	#24337
9,550	15.3	
6,590	15.3	
2,700	8.5	
18,700	15.5	#24339
13,100	15.7	
7,500	11.9	
4,000	8.3	
26,300	13.8	#24513
22,300	15.6	
17,900	17.7	
N/A	N/A	
28,800	15.3	#24333
24,300	17.1	
18,500	18.4	
8,800	12.6	

FEATURES

- Brushless Magnet EC Motor
- Fiberglass Reinforced SMC Shell
- Incorporated Ecotight Shutter
- Variable Speed/Soft Start
- Robust Direct-Drive Structure

BENEFITS

- Delivers exceptional performance: air volume, efficiency, and superior corrosion resistance.
- Direct drive fan with soft start allows for longer life on the motor and less wear on the components.
- Variable Speed Motor offers a wide operating range, superb Air Flow Ratio, and excellent efficiency, with no maintenance required for belts, pulleys, or tensioners.
- Robust housing slides mount through the wall or allows for an exterior mount, with a cone design that's no wider than the housing, allowing for closer spacing than traditional fans.
- Aerodynamic design for maximum air performance and reduction of air leakage to achieve maximum CFM/W.

