




CSW4612 ACTUATED CEILING SIDEWALL INLET


Installation Instructions



**DO NOT STORE IN
DIRECT SUNLIGHT**



**CSW INLET WITH CLOSURE
BRACKET**

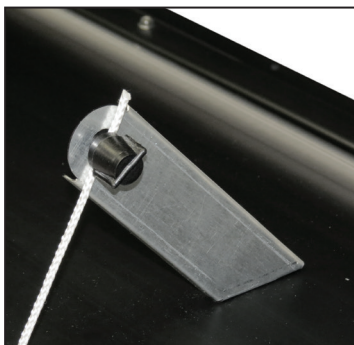

**CSW INLET WITH SPLIT
BOLT AND NUT**

INSTALLATION INSTRUCTIONS

- Need framed opening of 46.5" x 12.5".
- Remove closure bracket and reinstall upright (see picture above right).
- Run bead of caulk around top outside edge of inlet.
- Fasten inlet to ceiling with 10 - #10 x 2" screws (not included).
- Hole in closure is designed for split bolt and nut (see picture to the right).



(563) 875-6257 or 1-800-553-4102

www.doublel.com

www.youtube.com/doublelgroup