





# DL3232 INSULATED 2-WAY ATTIC INLET

## Installation Instructions




DO NOT  
STORE IN  
DIRECT  
SUN-  
LIGHT

FIGURE 1

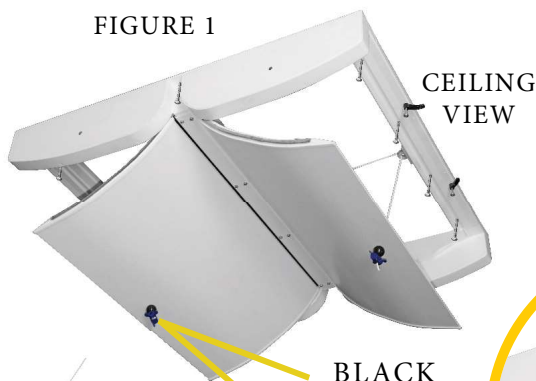

CEILING  
VIEW

FIGURE 2

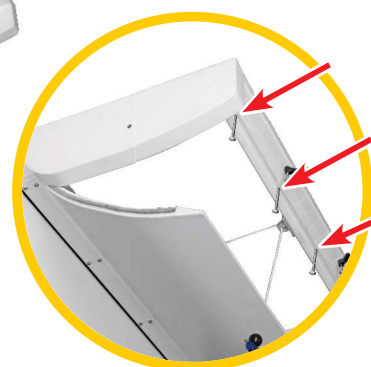

INSERT SCREWS IN  
PRE-DRILLED HOLES  
(DO NOT USE WASHERS)



1/8" STAINLESS  
STEEL  
CABLE CLAMP

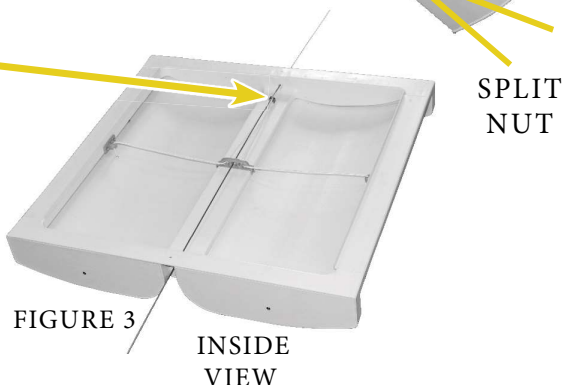


FIGURE 3


INSIDE  
VIEW

BLACK  
BALL

SPLIT  
NUT

## INSTALLATION INSTRUCTIONS

- Need framed opening of 28" x 28"
- Install attic sleeve in framed opening
- Run bead of caulk around the top, outside edge of the inlet.
- Fasten inlet to the ceiling with 10 - #10 x 2" screws (supplied) into pre-drilled holes under lid. (See Figure 2). DO NOT USE WASHERS.
- Run pull line through the inlet and center winch blocks.
- With actuator in full closed position, fasten nylon pull strings close to outside edge of inlet with stainless steel clamp.
- With black ball and split bolt nut, anchor lid to closed position.
- Open and shut inlet a few times. Then readjust lids as needed.

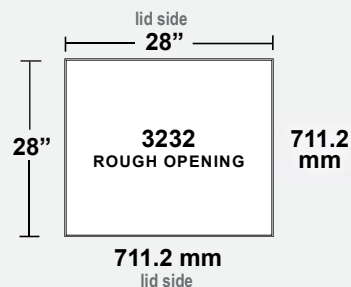

(563) 875-6257 or 1-800-553-4102

[www.doublel.com](http://www.doublel.com)

[www.youtube.com/doublelgroup](http://www.youtube.com/doublelgroup)