




DIRECTAIRE RECESSED ACTUATED WALL AIR INLET

Installation Instructions


To view full installation video, visit <http://www.doublel.com/directaire-wall-inlets.html>

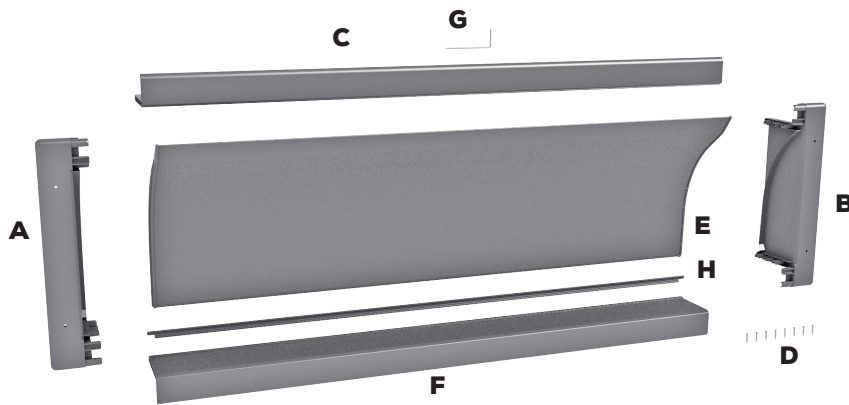


PARTS LIST

- A Left Endcap
- B Right Endcap
- C Long Frame Section w/ Section w/ Brush Seal
- D Plastic Nails (8)
- E Louver
- F Long Frame w/ Hinge Profile
- G Shut-off
- H Plastic Hinge

INLET ASSEMBLY INSTRUCTIONS



Step 1. Install frame profile with brush seal onto side endcap.



Step 2. Install long frame section with hinge profile onto side endcap.




Step 3. Slide plastic hinge onto inlet hinge profile.



Step 4. Slide curved louver blade onto plastic hinge.



Step 5. Install other side endcap.



Step 6. Using a rubber mallet, be sure endcaps are securely in place.



Step 7. Using a rubber mallet, install eight plastic nails in holes, securing inlet together.

INLET INSTALLATION INTO WALL




Step 1. Install inlet into the framed opening.



Step 2. With inlet in place, fasten endcaps securely using four 2-inch screws.



Step 3. Fasten 1 screw into center of bottom profile. Be sure it's straight across bottom.

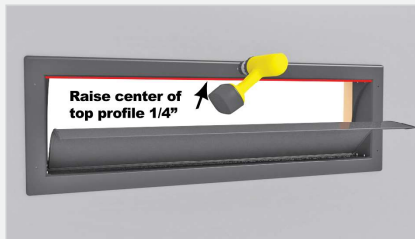

Step 4. Push slightly up in center of top profile (about 1/4"). Once in place, fasten to wall. Make sure louver opens and shuts easily without binding.



Step 5. Install shut-off. Screw in just above flange, close to center, avoiding pulling cable.



Step 6. Install winch block or pulley at the top of the inlet.




Step 7. Pull string through hole in louver, then through block or pulley towards direction of pull.



Step 8. Caulk all four sides of inlet after installation for improved inlet performance.

NOTE: After actuator is installed, readjust all inlets to make sure they shut properly.




DO NOT STORE BOXES OR INLETS IN DIRECT SUNLIGHT.


IF DO NOT FOLLOW INSTRUCTIONS, WARRANTY WILL BE VOID.

WARNINGS

Please read before installing



USE OF A METAL HAMMER CAN RESULT IN DAMAGE TO INLET HOUSING



DO NOT OVERTIGHTEN SCREWS! TIGHTEN UNTIL FLUSH, DO NOT DENT THE HOUSING!



DIRECTOIRE SHUT-OFF INSTALLATION (PLACED AT TOP & CENTER OF INLET)



A WIND DEFLECTOR MUST BE INSTALLED TO PROTECT FROM DIRECT SUNLIGHT

(563) 875-6257 or 1-800-553-4102

www.doublel.com

www.youtube.com/doublelgroup